

Mark	Number of place	autograph	Date	Explain


Rest 1.6

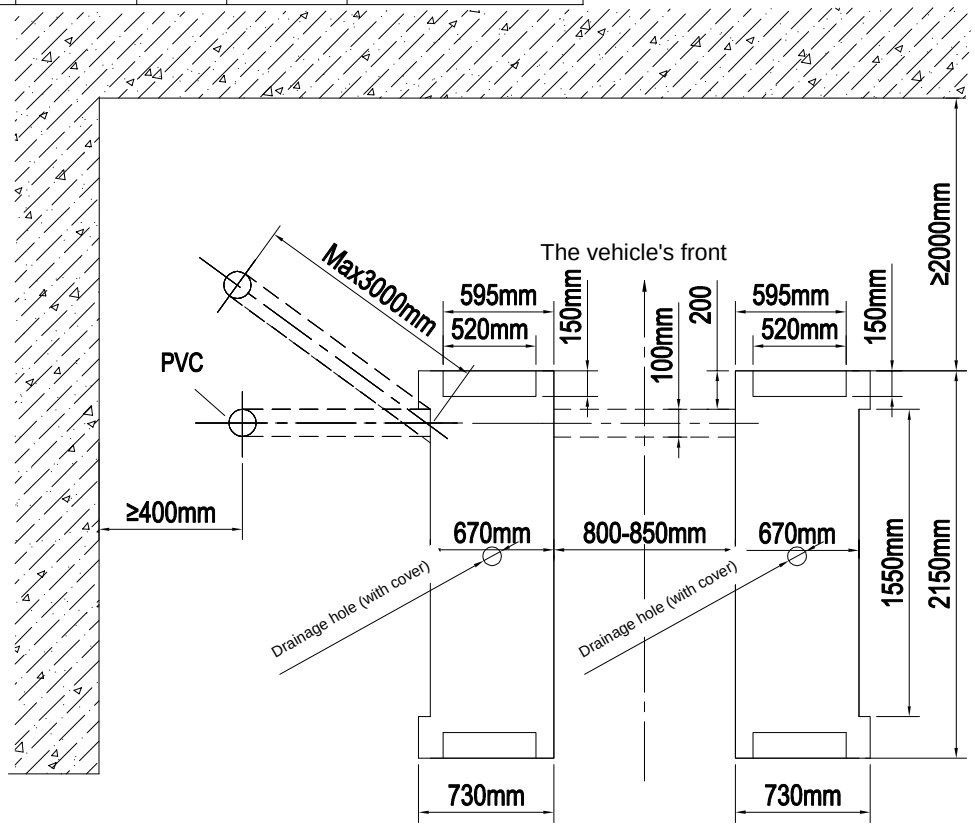


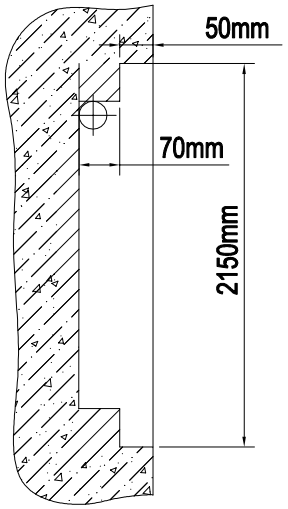

Notes:

1. The tolerances between the two foundations ≤5mm.
2. The control box can be installed on either side.
   The control box is installed on the side of the main platform.
3. Use No. 46 anti-wear hydraulic oil, approx. 25 L.
4. Select the spacing between the foundation pits
   to suit the types of vehicles to be serviced.

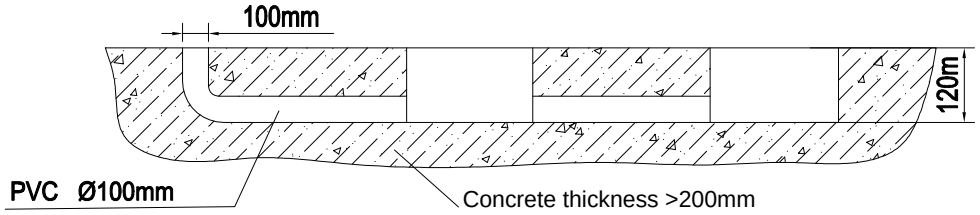

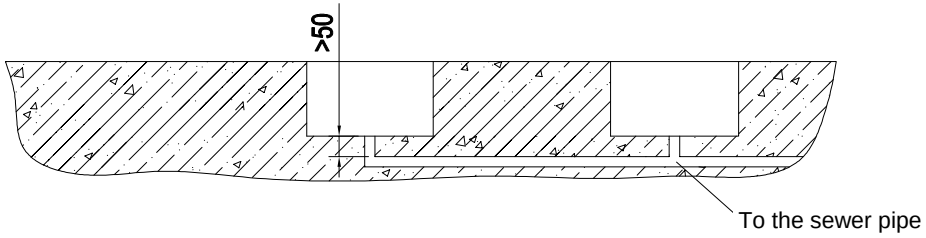

Standardization			MATERIAL:	Q235	FIRST ANGLE PROJECTION	
Drafting			surface treatment		SCALE:	1:1
To examine			Name	TLT635AF-635FW		
Approval						
Emergency contact number			Figure No.			